

FieldSmart® Fiber Crossover Multi Purpose (FxMP) Patch Panels



Application

Provides an interconnect or cross-connect environment for up to 288 SC ports or 576 LC ports of high density fibre for inside plant environments and outside FDH deployments.

Description

The FieldSmart FxMP Panel is a high density, low maintenance fibre distribution panel for use in a data style rack/cabinet, a 19" (482.60 mm) or a 23" (584.20 mm) frame. Utilizing the Clearview® Cassette, FieldSmart FxMP Panels are intelligently designed to provide the user with superior fibre access and craft-friendly, radius protected, fibre management for routing and deploying fibre jumpers.

Stand Alone Panel in a 19" or 23" (482.60 mm or 584.20 mm) Frame

When you already have the frame and want to add just a panel or two of incremental fibre management, the FxMP is configured with front and rear protection blocks for complete slack storage and physical fibre protection.

Stand Alone Panel in an OSP Active Cabinet

Make the crossover into the OSP with the identical product. Patch only environments are supported without additional components, while a rear protection block enables patch and splice (Clearfield's in-cassette splicing solution) configurations. The common architecture saves you time and money in reducing inventory costs and shorter training period.

Stand Alone Panel in a Data Rack/Cabinet

When you already have a data rack or cabinet and simply need to add fibre management, the FxMP is available to mount in this smaller footprint, providing all the fibre protection you need without the added cost. Available in black.



Top Protection - Closed



Top Protection - Black

Features and Benefits

Integrity

- RUS listed
- Complies with IEC 61300
- Supports all industry standard singlemode connectors

Protection

- Front cover is easily removable and installation of cassettes is simple with no tools needed
- Individual radius fingers provide organized and intuitively managed fibre jumpers and minimize pile-up
- Slide rails for cassettes provide a stable attachment utilizing the cassette T-rail, and are incorporated into the rear protection of panels
- Pre-terminated OSP buffer tubes are protected by bend-limited tubing and have their slack stored inside the panel to protect against environmental and human damage
- The top metal protective cover slides out for top protection over the fibre cables and can sit in 3 positions: closed, open 3.25" (82.55 mm) and open 4.77" (121.16 mm)

Access

- Front access to pre-terminated assemblies with removable adapter plates for testing, cleaning and maintenance
- The entire 12-fibre Clearview Cassette is removable for hot-swap changes
- Front and rear access to panel
- New larger designation cards provide greater writing area for standard and high density panels
- Reversible Mounting Ears provide added flexibility

Investment

- Using the Clearview Cassette, all fibres are deployed in increments of 12, allowing users to scale from 12 ports to full configuration without additional equipment

FieldSmart® Fiber Crossover Multi Purpose (FxMP) Patch Panels



Technical Specifications

FieldSmart FxMP Patch Panels					
Port Density	24/48	72/144	96/192	144/288	288/576
Dimensions	1.75" H (44.45 mm)	3.5" H (88.90 mm)	4" H (101.60 mm)	6" H (152.40 mm)	11" H (279.40 mm)
Ratings	Complies with IEC 61300				
Cassette Types Supported	Clearview® Blue with 1 mounting tab				
Connector Types	SC/UPC, SC/APC, LC/UPC, LC/APC, MPO				
Cable Types	Indoor Riser, Indoor Plenum, Indoor/Outdoor, Outdoor (Riser/Non-Rated), Outdoor Armoured (Riser/Non-Rated), FieldShield®				
Splice Capacity	12-24 splices in each Clearview Cassette				
Storage Capacity	One meter of 250 µm fibre				
Front Protection	3.25" (82.6 mm) or 4.77" (121.16 mm) radius fingers				
Colour	Almond or black				
Material	Steel and aluminium with powder paint coating				

Configured Part Numbers - Patch and Splice

G - _____ - _____ - _____ - _____ **Z Z**

1
2
3
4
5
6
7
8

1 Select Chassis Size*

J = 1.75" (44.45 mm)(1 RU) 24/48 port maximum (SC/LC)
 E = 3.50" (88.90 mm)(2 RU) 72/144 port maximum (SC/LC)
 K = 4" (101.60 mm) 96/192 port maximum (SC/LC)
 G = 6" (152.40 mm) 144/288 port maximum (SC/LC)
 H = 11" (279.40 mm) 288/576 port maximum (SC/LC)

2 Select Panel Type

B = Patch and splice
 C = MPO (12 fibre)
 D = Tie
 F = HD Patch and Splice
 J = HD Tie

3 Select Color and Rod Size

A = Almond 3.25" (82.55 mm)
 B = Almond 4.77" (121.16 mm)
 C = Black 3.25" (82.55 mm)
 D = Black 4.77" (121.16 mm)

4 Select Port Count

X X X = port count in increments of 12
 X X X = port count in increments of 24 (HD Version)

5 Select Connector Style

A = SC/UPC
 C = SC/APC
 F = LC/UPC
 H = LC/APC
 Z = None

6 Select Mode / Type

0 = No Fibre
 1 = Singlemode - non-ribbon
 2 = Singlemode - ribbon

7 Select Jacket Construction

F = Loose Tube
 Z = N/A

8 Select Rear Protection

A = Slack Basket
 B = Rear Cover

* Max port counts are for SC and LC adapters.
 For ST and FC adapters the max port counts are:

1RU = 24 4" = 48 11" = 192
 2RU = 48 6" = 96

FieldSmart® Fiber Crossover Multi Purpose (FxMP) Patch Panels



Configured Part Numbers - Patch Only

G - _____ - _____ - _____ - _____ - _____ **Z** XXXM or XXXF

1 2 3 4 5 6 7 8 9

1 Select Chassis Size*

J = 1.75" (44.45 mm)(1 RU) 24/48 port maximum (SC/LC)
 E = 3.50" (88.90 mm)(2 RU) 72/144 port maximum (SC/LC)
 K = 4" (101.60 mm) 96/192 port maximum (SC/LC)
 G = 6" (152.40 mm) 144/288 port maximum (SC/LC)
 H = 11" (279.40 mm) 288/576 port maximum (SC/LC)

2 Select Panel Type

A = Patch Only
 E = HD Patch Only (LC)

3 Select Color and Rod Size

A = Almond 3.25" (82.55 mm)
 B = Almond 4.77" (121.16 mm)
 C = Black 3.25" (82.55 mm)
 D = Black 4.77" (121.16 mm)

4 Select Port Count

X X X = port count in increments of 12
 X X X = port count in increments of 24 (HD version)

5 Select Connector Style

A = SC/UPC
 C = SC/APC
 F = LC/UPC
 H = LC/APC
 Z = None

6 Select Mode / Type

0 = No Fibre
 1 = Singlemode - non-ribbon
 2 = Singlemode - ribbon

7 Select Cable Construction

A = Indoor riser rated (IFC)
 B = OSP (riser rated, indoor/outdoor)
 C = Indoor, plenum (IFC)
 E = OSP (non-rated)
 F = Patch and splice
 M = OSP (armored)
 Z = N/A

8 Select Rear Protection

A = Slack Basket
 B = Rear Cover

9 Select Cable Exit**

1 = Top right 5 = Top
 2 = Top left 6 = Bottom
 3 = Bottom right 7 = Right
 4 = Bottom left 8 = Left

XXXM or XXXF

XXXM = Length in meters
 XXXF = Length in feet


* Max port counts are for SC and LC adapters.
 For ST and FC adapters the max port counts are:

1RU = 24 4" = 48 11" = 192
 2RU = 48 6" = 96

** Cable exit is defined by which direction the cable exits the panel when viewing it from the back.

Configurations

FieldSmart Fibre Crossover Multi Purpose (FxMP) Front Views

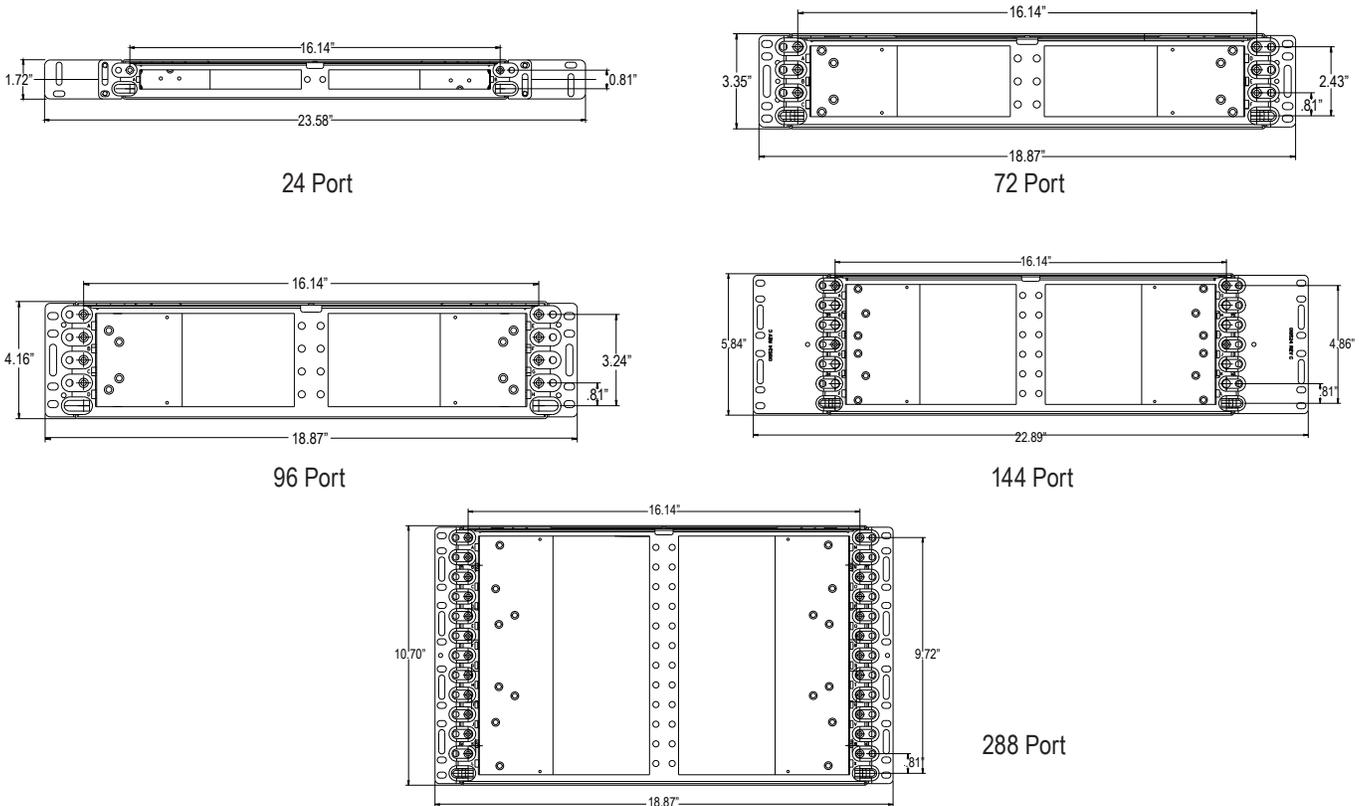


FieldSmart® Fiber Crossover Multi Purpose (FxMP) Patch Panels




Configurations

FieldSmart Fibre Crossover Multi Purpose (FxMP) Top Views

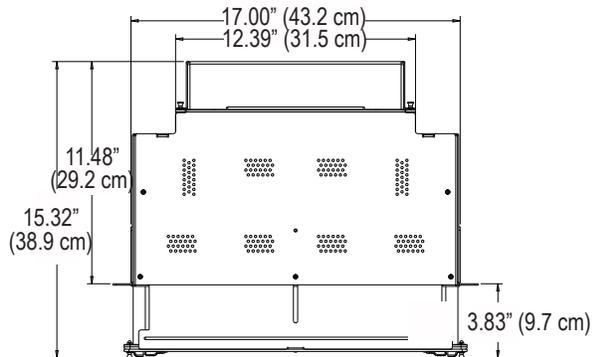


Bulkhead with Slack Basket - Top View
Shown with Short Rods (3.25")

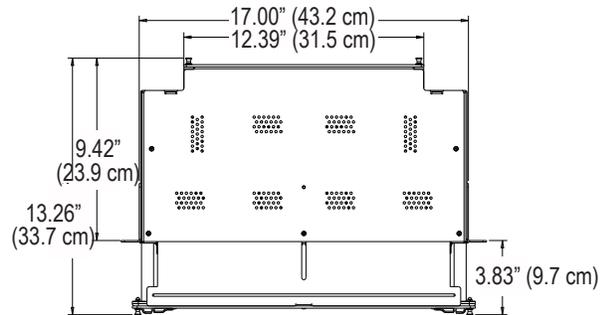


Bulkhead with Rear Door - Top View
Shown with Short Rods (3.25")

FieldSmart Fibre Crossover Multi Purpose (FxMP) 24 Port Fibre Panels

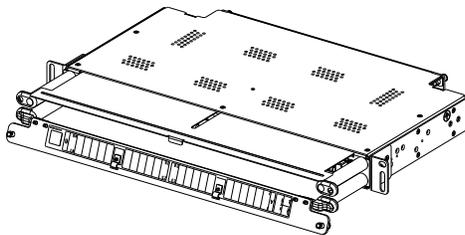


24 Port
Front View

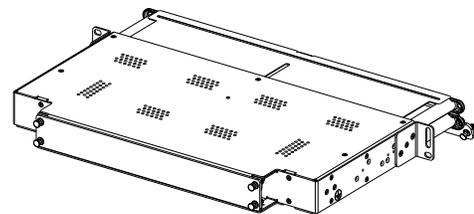


24 Port
Rear View with Rear Protection

FieldSmart Fibre Crossover Multi Purpose (FxMP) 72 Port Fibre Panels

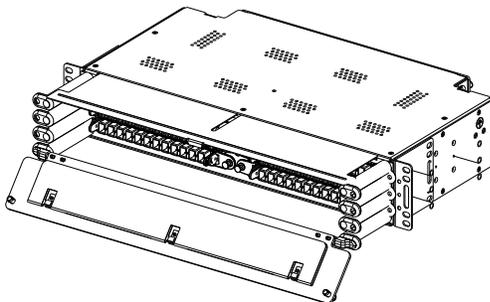

72 Port
Front View

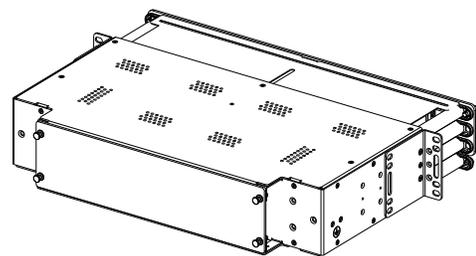


72 Port
Rear View with Rear Protection

FieldSmart[®] Fiber Crossover Multi Purpose (FxMP) Patch Panels




Configurations

FieldSmart Fibre Crossover Multi Purpose (FxMP) 96 Port Fibre Panels

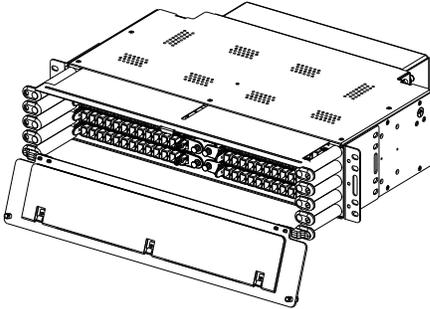


96 Port
Front View with Slack Basket

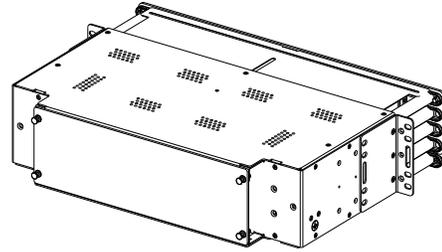


96 Port
Rear View with Rear Protection

FieldSmart Fibre Crossover Multi Purpose (FxMP) 144 Port Fibre Panels

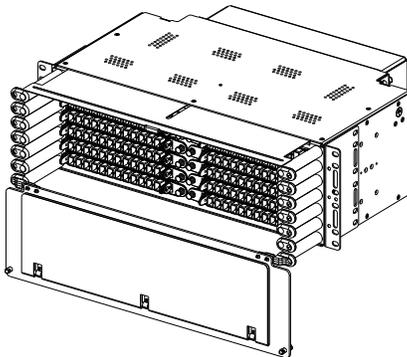


144 Port
Front View with Slack Basket

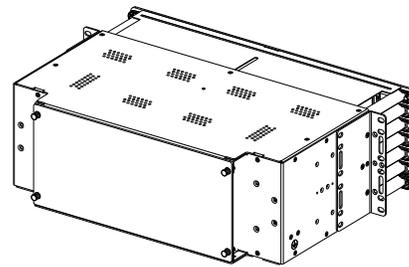


144 Port
Rear View with Rear Protection

FieldSmart Fibre Crossover Multi Purpose (FxMP) 288 Port Fibre Panels

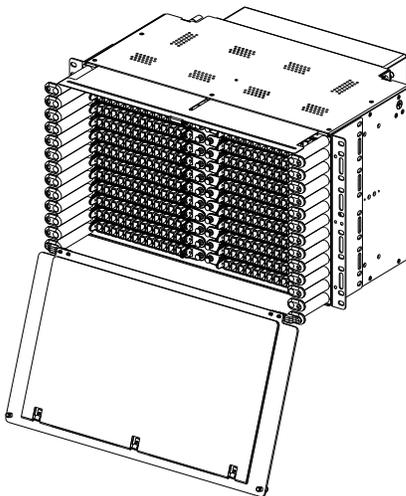

288 Port
Front View with Slack Basket

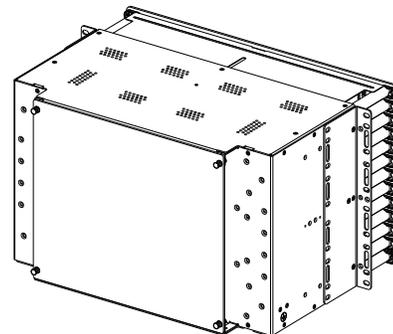

288 Port
Rear View with Rear Protection