

# FieldSmart® Mini TAP Home Deployment Kit



## Application

FieldSmart® Mini TAP Home Deployment Kit (HDK) extends Clearfield®'s field-proven fibre management expertise and leading-edge fibre connectivity performance all the way into the home. With the FieldSmart Mini TAP, the Home Deployment Kit packages the required patch cords, fibre jack (Clearfield's CraftSmart® Fibre Outlet) and necessary adaptor installation accessories in a single box. Truck rolls are minimised and customer turn-up is rapid. Choose the FieldSmart Mini TAP HDK for environments where plug-and-play along with internal slack storage is desired within the unit mounted outside the home.

### FieldSmart Mini TAP

The FieldSmart Mini TAP provides a secure demarcation point between the service provider network and SFU. Mini TAP gives the network service provider both the ability to store slack fibre as well as provide a test access point (TAP) for ease of deployment and network maintenance without needing to have access to the interior of the customer premises. FLEXdrop® Deploy Reel mounts easily on the supplied pin, allowing 50, 75 and 100 feet of pre-connectorised FLEXdrop to be deployed into the premises. With the ability to accept a variety of drop cables with up to 50' of incoming cable slack storage, Mini TAP can be wall or pole mounted, and can be integrated into any network architecture and deployment.

#### Integrity

- Supports industry standard SC adaptors
- Includes entrance points with multi-purpose strain reliefs

#### Protection


- UV Stable Polycarbonate
- Snap and screw latching system

#### Access

- Accepts 10mm microduct, 3mm cable, standard flat drop and Small Form Factor FLATdrop

#### Investment

- Access available without customer needing to be there to identify potential problems



### CraftSmart Fibre Outlet

The CraftSmart Fibre Outlet can accommodate 4 entrance points for 3mm cable and up to 4 SC adaptor ports. The splice tray is hinged and easily removable for non-splicing applications. This small indoor enclosure provides both bend limiting protection and a secure termination point to connect the entrance fibre to the included equipment jumper.

#### Integrity

- Supports industry standard SC adaptors

#### Protection

- Snap-on cover for dust free protection

#### Access

- Easy installation
- Accommodates 4 adaptor ports
- Four cable entrance points

#### Investment

- Cables can be connected without splicing
- Hinged and detachable splice tray



### FieldShield FLEXdrop

FieldShield® FLEXdrop cable has an OSP-rated PVDF jacketing that allows for transition of FLEXdrop from the OSP environment directly into the inside plant, with the added benefit of being UL listed for plenum applications. FLEXdrop can be used as a building wrap at turn-up, maximising installation efficiency.

#### Integrity

- Available in singlemode
- Supports all industry standard connectors
- Terminations designed, tested and certified to GR-326
- FLEXdrop fibre cable designed, tested and certified to GR-20

#### Protection

- UL listed for plenum applications for single fibre only
- Passed UV testing and measurement standards per ASTM G155 for UL 1581
- Bend-insensitive (G.657.A2) fibre protects optical signal with minimal to zero attenuation down to a 10 mm radius
- OSP rated PVDF jacketing provides ruggedised protection for the patchcord or pigtail
- Staple-ready for walls, joists and around corners, with Crown T-18 staples
- Swellable yarns for water blocking capabilities

#### Access


- Standard colour is black with an option for off-white
- Suitable for all types of indoor and outdoor implementations (duct required for aerial and direct bury)

#### Investment

- Easy deployment allows capital investment to be aligned to customer take rates



# FieldSmart® Mini TAP Home Deployment Kit

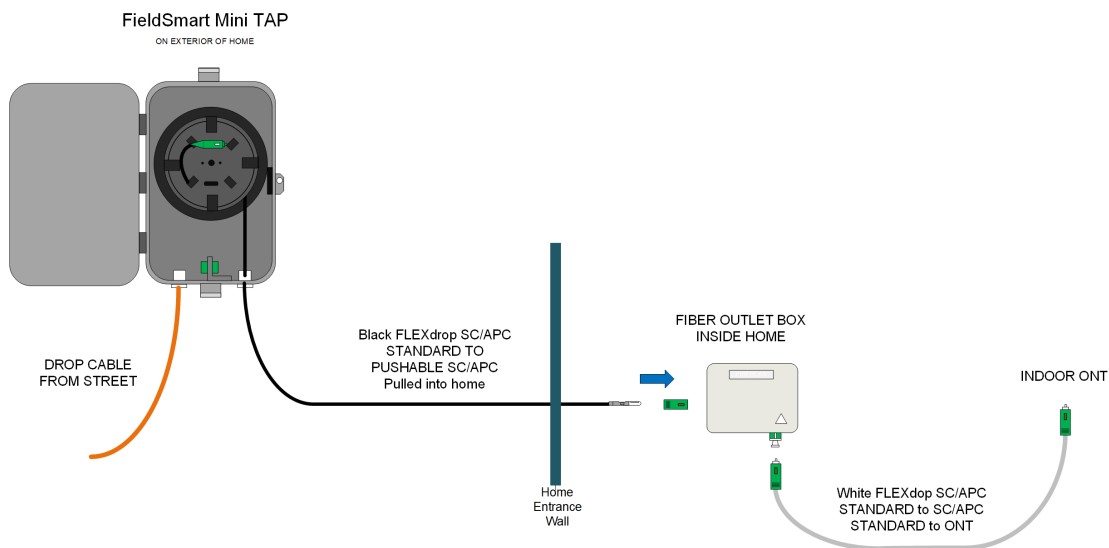

## Technical Specifications

FieldSmart Mini TAP	
Dimensions	9" H x 6" W x 3.91" D (228mm x 152mm x 99.31mm)
Colour	Grey
Rating	Complies with IEC 61300 & IP 66
Material	UV Stabilised, Flame Retardant Polycarbonate
Adaptor Style Receptacle	SC/APC and SC/UPC
Port Count	1
Seals	2 Split Seals for 3mm OD Cable
Mounting Options	Wall or Pole Mount

CraftSmart Fibre Outlet	
Dimensions	3.9 x 3.2 x 1.25 inches (100 x 80 x 32 mm)
Colour	White
Operating Temperature	-20°C to 60°C
Material	ABS
Adaptor Style Receptacle	SC and LC
Adaptor Slots	4 Slots
Accessories	Removable Storage Tray

# FieldSmart®

## Mini TAP Home Deployment Kit



FieldShield FLEXdrop	
Fibre	Corning ClearCurve Optical Fibre or equivalent
Clad Diameter	125.0 ± 0.7 µm
Coating Diameter (Uncoloured)	235 - 245 µm
Bend-Insensitive	Bend-Insensitive Fibre G.657.A2
Colour Code	TIA/EIA 598 (US Standard)
Fibre Count	Single and dual fibre
Pushable Connectors	FieldShield SC/UPC and SC/APC
Standard Connectors	SC/UPC and SC/APC
Mode	Singlemode
Internal Fibre Size	900 µm
Outside Diameter	0.118" (3 mm)
Colour	Black or white
Material	PVDF
Bend-Radius	Standard to G.657.A2 specifications
Installation Temperature	-22°F to 131°F (-30°C to 55°C)
Operating Temperature	-40°F to 176°F (-40°C to 80°C)
Installation Tension	20 lbf
Markings	Part number, lot number and footage markers every two feet (609.60 mm)
Cable Attenuation Spec	0.35 dB/km @ 1310 nm/0.25 dB/km @ 1550 nm

### Home Deployment Kits Include:

- FieldSmart Mini TAP
- CraftSmart Fibre Outlet
- Black Entrance Cable: FLEXdrop Pushable Cable (Configurable adaptor and lengths)
- White Equipment Cable: FLEXdrop Pushable Cable (Configurable adaptor and lengths)

### Configured Part Number

**HDK - G**    **D**    **FW**  
1 2 3    -    4 5 6    -    7 8 9


<p><b>1 Select Box Option</b>  A = 50 Foot Storage Reel  C = Deploy Reel – Adaptor Reel  Z = None</p> <p><b>2 Select Adaptor</b>  A = SC/UPC  C = SC/APC</p> <p><b>3 Select Fibre Outlet Adaptor</b>  A = SC/UPC  C = SC/APC</p>	<p><b>4 Select Connector 1 for Entrance</b>  A = SC/UPC  C = SC/APC</p> <p><b>5 Select Connector 2 for Entrance</b>  B = Pullable SC/UPC  D = Pullable SC/APC</p> <p><b>6 Select Length</b>  4 = 50 ft.  5 = 75 ft.  6 = 100 ft.</p>	<p><b>7 Select Connector 1 for Equipment</b>  A = SC/UPC  C = SC/APC</p> <p><b>8 Select Connector 2 for Equipment</b>  A = SC/UPC  C = SC/APC</p> <p><b>9 Select Length</b>  A = 2 metres  1 = 10 ft.  2 = 15 ft.</p>
--	--	---

# FieldSmart<sup>®</sup>


Mini TAP Home Deployment Kit



Mini TAP



Deploy Reel Mounting Plate



Multi-Purpose Strain Relief



Slack Storage Reel-50



FLEXdrop Deploy Reel